


DMB04 4-in-1 Multifunction Indoor Air Quality Large LED Display / Monitor / Indicator

**Tackle Invisible Killer PM2.5 To Reduce risk of cancers!
Let's Create Healthy interior Environment!**

Real-Time, React Quickly, High Brightness LED

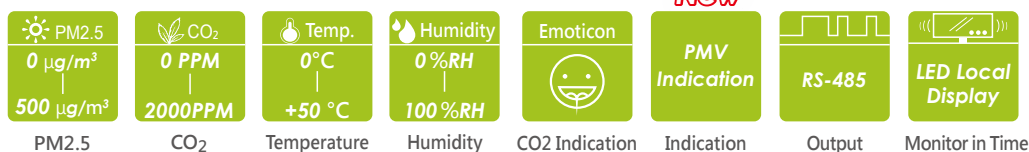

Features

- **【4-in-1】** Monitor PM2.5, CO₂, temperature & humidity via RS-485 at the same time.
- **【High Brightness LED】** Easily recognize measuring types and values.
- **【6-segment CO₂ Emoticon】** As the local situation and refer to CO₂ indication standards to transfer the suitable emoticon
- **【6-segment PMV Indication】** Refer to PMV indication to display the real-time body sensing.
- **【Bargain Set】** eYc Multifunction PM2.5 Indoor Air Quality Monitor (type : eYc TGP03)

應用領域

- Monitor environment for Industrial Process / Plant / IDC / Clean room / Laboratory / Agriculture
- Storage / Hospital / Department store / Office building / Hotel / Restaurant / Library / Banks and so on.



技術概觀

Display Scale

Display Type	High Brightness LED
Temperature	1.5" (3.8 cm) red LED
Humidity	1.5" (3.8 cm) red LED
PM2.5	2.3" (5.8 cm) yellow LED
CO ₂	2.3" (5.8 cm) green LED

Display Range with eYc TGP03

Temperature	0 ... 50 °C
Humidity	0 ... 100 %RH
PM2.5	0 ... 500 µg / m ³
CO ₂	0 ... 2000 PPM

Input

RS-485

Output

Signal Output	RS-485
Protocol	Protocol
Interface	Modbus RTU
Power	AC 230V / DC 24V, 5A
Address	1 ... FF (16 Hex)
Baud Rate	19200, 9600, 4800, 2400, 115200, 57600, 38400
Frame	N.8.1, N.8.2, E.8.1, O.8.1

Installation

Installation	Indoor and Wall type
--------------	----------------------

Dimension

Dimension	460 (L) x 295 (H) x 60 (D) mm
-----------	-------------------------------------

■ Bargain Set : TGP03 Multifunction PM2.5 Indoor Air Quality Monitor



Measuring range

Temperature : 0 ... 50 °C
 Humidity : 0 ... 100 %RH
 PM2.5 : 0 ... 500.0 µg / m³
 CO₂ : 0 ... 2000 PPM

Accuracy

Temperature : ± 0.4°C
 Humidity : ± 3 %RH (at 20 ... 90 %RH)
 PM2.5 : ± 10 µg / m³ ± 5 % of Reading
 CO₂ : ± 40 PPM ± 3 % of Reading

Carbon Dioxide (CO₂) Indication

Emoticon						
CO ₂ (PPM)	350 PPM	450 PPM	600 PPM	1000 PPM	2500 PPM	5000 PPM
Health Implication	Health, normal outside level	Acceptable level	Contaminated air	Drowsiness occurs	Adverse health effects	Time weighted averaging exposure time < 8 hours


PMV Indication

Range	10 or less	11~15	16~19	20~26	27~31	above 31
Feeling	Chilly	Cold	Cool	Comfy	Sizzling	Heat stroke

Formula : T_m : °C ; t_b : dp °C ; When air reaches temperature saturation : more water vapor → dew point will be higher

$$PMV \text{ index} = T_m - 0.55 \times 1 - \frac{\exp\left[\frac{17.269 \times t_b}{t_b + 273}\right]}{\exp\left[\frac{17.269 \times T_m}{T_m + 273}\right]} \times (T_m - 14)$$

Organization

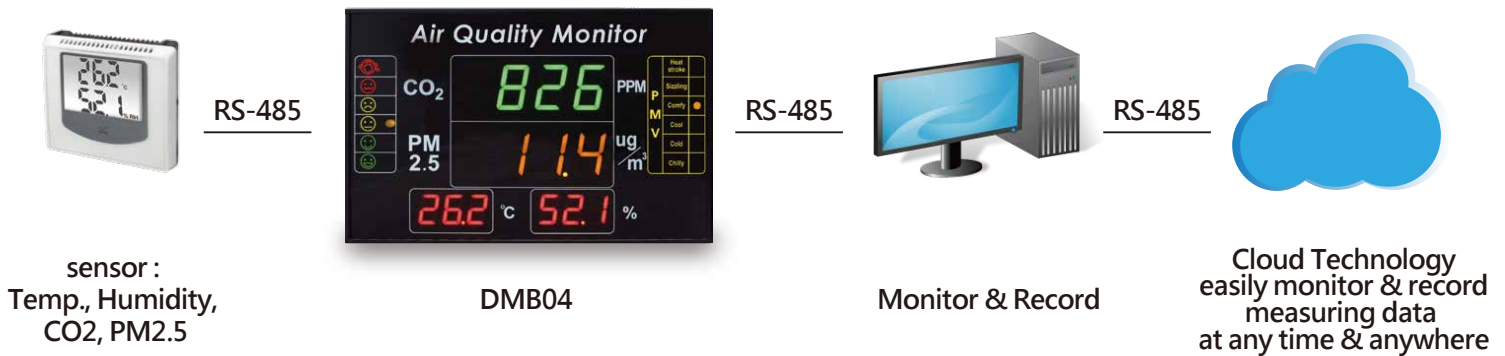

Diagram

