



Pressure transmitter

Relative pressure transmitter Type 525



The pressure transmitter type 525 has a compact and robust design and a very high measurement accuracy. The pressure transmitter with its large variety of pressure and electrical connection has also pressure ranges from 50 mbar full scale.

The compact 525 pressure transmitter is based upon the well proven ceramic technology developed by Huba Control over 20 years ago.

Pressure range
0 ... 0.05 – 0.6 bar

- + Very high measurement accuracy
- + Excellent thermal characteristic
- + Pressure ranges from 50 mbar full scale available
- + Compact and rugged construction
- + Large selection of connections available

Technical overview

Pressure range

Relative 0 ... 0.05 – 0.6 bar

Operating conditions

Medium		Liquids and gases
Temperature	Medium	FPM -15 ... +85 °C
		EPDM -25 ... +85 °C
		NBR -20 ... +85 °C
	Ambient	-25 ... +85 °C
	Storage	-40 ... +85 °C
Tolerable overload / rupture pressure		2 bar
Tolerable negative pressure		-0.3 bar

Materials

Plug accommodation		Polyarylamide 50% GF UL 94 V-0
Materials in contact with medium	pressure connection	Stainless steel 1.4404 / AISI 316L
	measuring element	Ceramics Al ₂ O ₃ (99.6%)
	sealing material	FPM, EPDM, NBR

Electrical overview

2 wire	Output	4 ... 20 mA	Power supply	10 ... 30 VDC	Load	< $\frac{\text{supply voltage} - 10 \text{ V}}{0.02 \text{ A}}$ [Ohm]	Current consumption	< 23 mA
		0 ... 5 V		7 ... 33 VDC		>10 kOhm / < 100 nF		< 5 mA
3 wire		0 ... 10 V		12 ... 33 VDC		>10 kOhm / < 100 nF		< 5 mA
		ration. 10 ... 90%		5 VDC ± 10%		>10 kOhm / < 100 nF		< 5 mA
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.							
Insulation voltage	500 VDC							

Dynamic response

Start-up time	< 200 ms
Response time	< 150 ms
Load cycle	< 100 Hz

Electrical connection

Electrical connection	Protection standard	Protection class
Connector DIN EN 175301-803-A	IP 65	III
Connector DIN EN 175301-803-C (Industrial standard 9.4 mm)	IP 65	III
Connector M12x1	IP 67	III
Swift connector without or with cable 1.5 / 2 / 3 / 5 m (PVC spez.)	IP 67	III


Pressure connection

Inside thread	G ¼	with Profile seal ring in FPM
	¼ -18 NPT	
	R ¼	nach EN 10226
Outside thread	G ½	sealed at front
	G ¼	sealed at back DIN 3852-E with Profile seal ring in FPM
	G ¼	sealed at front
	G ¼	sealed at back DIN 3852-E with Profile seal ring in FPM
	G ½	sealed at front
	G ½	sealed at back DIN 3852-E with Profile seal ring in FPM, with hole Ø11 mm

Installation arrangement

Unrestricted (Note the position error!)

Tests / Admissions

Electromagnetic compatibility	CE conformity acc. EN 61326-2-3
Shock acc. IEC 68-2-27	50 g, 6 ms half sine wave, all 6 directions, free fall from 1 m on concrete (6x)
Vibration nach IEC 68-2-6	20 g, 15 ... 2000 Hz, 15 ... 25 Hz with amplitude ± 15 mm, 1 Octave/min. all 3 directions, 50 constant load
UL	ANSI/UL 61010-1 acc. E325110
EAC	
Protection against explosion 	Ex II ½ G Ex ia IIC T4 Ga/Gb
(4 ... 20 mA) acc. ATEX and IECEx	Ex II ½ D Ex ia IIC T120°C Da/Db

Weight

~ 120 g



Packaging (Please state on order)

Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

Accuracy

Parameter	Unit	
Characteristic line ¹⁾ (at 25 °C)	% fs	± 0.35 ²⁾
Resolution	% fs	< 0.1
Long term stability acc. IEC 60770-1 max.	% fs	± 0.25
Thermal characteristic ³⁾	% fs/10K	± 0.07
Location error horizontal mounting	mbar	+ 0.1
Location error vertical mounting, pressure connection upward	mbar	+ 0.2

Test conditions: 45% rH, power supply 24 VDC
Balance position: Vertical, pressure connection down

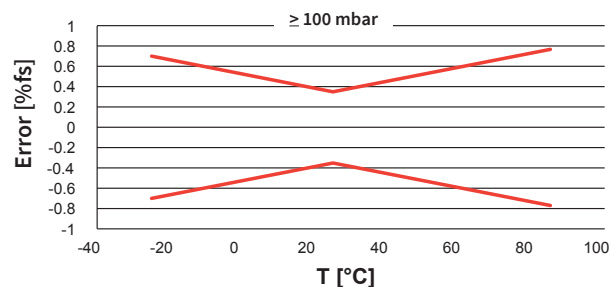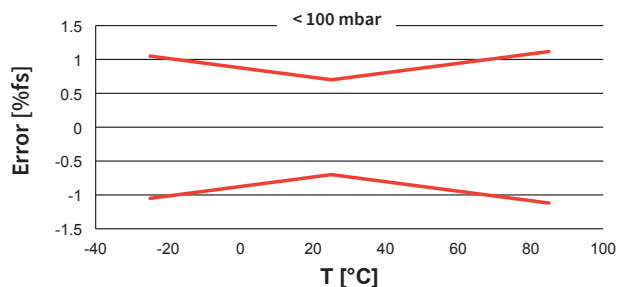

¹⁾ incl. zero point, full scale, linearity, hysteresis and repeatability

²⁾ fs < 100 mbar ± 0.7% fs

³⁾ the zero point and range at -25 ... +85 °C

			1	2	3	4	5	6	7	8	9	10	11		
Order code selection table in bar			525.	X	X	X	X	X	X	X	X	X	X	X	
Pressure range ¹⁾	0 ... 0.05 bar		9	2	1										
	0 ... 0.10 bar		9	2	2										
	0 ... 0.16 bar		9	2	3										
	0 ... 0.20 bar		9	2	4										
	0 ... 0.25 bar		9	2	5										
	0 ... 0.30 bar		9	2	6										
	0 ... 0.40 bar		9	2	7										
	0 ... 0.60 bar		9	2	8										
Sealing material	FPM	Fluoro elastomer				0	0								
	EPDM	Ethylene propylene				1	0								
	NBR	Butadiene Acrylonitrile				2	0								
Output / power supply	0 ... 5 V	7 ... 33 VDC							1						
	0 ... 10 V	12 ... 33 VDC							2						
	4 ... 20 mA	10 ... 30 VDC							3						
		10 ... 30 VDC							4						
	ration. 10 ... 90%	5VDC ±10%							7						
Electrical connection	Connector	DIN EN 175301-803-A ²⁾								1					
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾								2					
		M12x1 ²⁾	2L: IN=1 / OUT=3	3L: IN=1 / OUT=4 / GND=3						3					
		M12x1 ²⁾	3L: IN=1 / OUT=3 / GND=4						1,2	M					
	swift connector	without cable (PG9)									0				
		with cable 1.5 m									L				
		with cable 2.0 m									N				
		with cable 3.0 m									Q				
		with cable 5.0 m									R				
	Pressure connection ¹⁾	Outside thread	Inside thread G ¼ with O-Ring seal FPM									1	1	1	
¼ -18 NPT											3	1	1		
R ¼ acc. to EN 10226											7	1	1		
G ½ sealed at front											M	1	1		
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM											H	1	1		
G ¼ sealed at front											J	1	1		
G ¼ sealed at back DIN 3852-E with Profile seal ring in FPM											4	1	1		
G ½ sealed at front											9	1	1		
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM											8	1	1		
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm											S	1	1		
Pressure range variation (optional)	Indicate W and state range on order (e. g. W0... + 0.5bar/OUT0.5...4.5V)													W	

Accessories	Order number
Female connector DIN EN 175301-803-A with seal	103510
Connector DIN EN 175301-803-C with seal	104244
Corner-wire box for connector M12x1	106975
Calibration certificate	104551


			1	2	3	4	5	6	7	8	9	10	11		
Order code selection in psi			525.	X	X	X	X	X	X	X	X	X	X	X	
Pressure range ¹⁾	0 ... 1 psi		9	B	1										
	0 ... 2 psi		9	B	2										
	0 ... 3 psi		9	B	4										
	0 ... 5 psi		9	B	6										
	0 ... 10 psi		9	B	8										
Sealing material	FPM	Fluoro elastomer				0	0								
	EPDM	Ethylene propylene				1	0								
	NBR	Butadiene Acrylonitrile				2	0								
Output / power supply	0 ... 5 V	7 ... 33 VDC							1						
	0 ... 10 V	12 ... 33 VDC							2						
	4 ... 20 mA	10 ... 30 VDC							3						
		10 ... 30 VDC							4						
	ration. 10 ... 90%	5VDC ±10%							7						
Electrical connection	Connector	DIN EN 175301-803-A ²⁾									1				
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾									2				
		M12x1 ²⁾	2L: IN=1 / OUT=3	3L: IN=1 / OUT=4 / GND=3							3				
		M12x1 ²⁾	3L: IN=1 / OUT=3 / GND=4							1,2	M				
	Swift connector	without cable										0			
		with cable 1.5 m										L			
		with cable 2.0 m										N			
		with cable 3.0 m										Q			
		with cable 5.0 m										R			
	Pressure connection ¹⁾	Outside thread	Inside thread G ¼ with O-Ring seal FPM										1	1	1
¼ -18 NPT												3	1	1	
R ¼ acc. to EN 10226												7	1	1	
G ½ sealed at front												M	1	1	
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM												H	1	1	
G ¼ sealed at front												J	1	1	
G ¼ sealed at back DIN 3852-E with Profile seal ring in FPM												4	1	1	
G ½ sealed at front												9	1	1	
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM												8	1	1	
G ½ sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm												S	1	1	
Pressure range variation (optional)	Indicate W and state range on order (e.g.: W0... + 0.5bar/OUT0.5...4.5V)													W	

¹⁾ Other pressure ranges on request

²⁾ Delivery without female connector

Order code selection in MPa		1	2	3	4	5	6	7	8	9	10	11	
		525.	X	X	X	X	X	X	X	X	X	X	
Pressure range ¹⁾	0 ... 0.005 MPa	9	G	1									
	0 ... 0.010 MPa	9	G	2									
	0 ... 0.016 MPa	9	G	3									
	0 ... 0.020 MPa	9	G	4									
	0 ... 0.025 MPa	9	G	5									
	0 ... 0.030 MPa	9	G	6									
	0 ... 0.040 MPa	9	G	7									
	0 ... 0.060 MPa	9	G	8									
Sealing material	FPM	Fluoro elastomer			0	0							
	EPDM	Ethylene propylene			1	0							
	NBR	Butadiene Acrylonitrile			2	0							
Output / power supply	0 ... 5 V	7 ... 33 VDC					1						
	0 ... 10 V	12 ... 33 VDC					2						
	4 ... 20 mA	10 ... 30 VDC					3						
		10 ... 30 VDC (⊗)					4						
	ration. 10 ... 90%	5VDC ±10%					7						
Electrical connection	Connector	DIN EN 175301-803-A ²⁾						1					
		DIN EN 175301-803-C (Industrial standard 9.4 mm) ²⁾						2					
		M12x1 ²⁾	2L: IN=1 / OUT=3	3L: IN=1 / OUT=4 / GND=3				3					
	Swift connector	M12x1 ²⁾		3L: IN=1 / OUT=3 / GND=4				1,2	M				
		without cable (PG9)							0				
		with cable 1.5 m							L				
		with cable 2.0 m							N				
		with cable 3.0 m							Q				
		with cable 5.0 m							R				
		Pressure connection ¹⁾	Inside thread G 1/4 with O-Ring seal FPM								1	1	1
1/4 -18 NPT									3	1	1		
R 1/4 acc. to EN 10226									7	1	1		
G 1/8 sealed at front									M	1	1		
G 1/8 sealed at back DIN 3852-E with Profile seal ring in FPM									H	1	1		
G 1/4 sealed at front									J	1	1		
G 1/4 sealed at back DIN 3852-E with Profile seal ring in FPM									4	1	1		
G 1/2 sealed at front									9	1	1		
G 1/2 sealed at back DIN 3852-E with Profile seal ring in FPM									8	1	1		
G 1/2 sealed at back DIN 3852-E with Profile seal ring in FPM with hole Ø 11mm									S	1	1		
Pressure range variation (optional)	Indicate W and state range on order (e.p.: W0... + 0.5bar/OUT0.5...4.5V)											W	

Dimensions in mm / Electrical connections

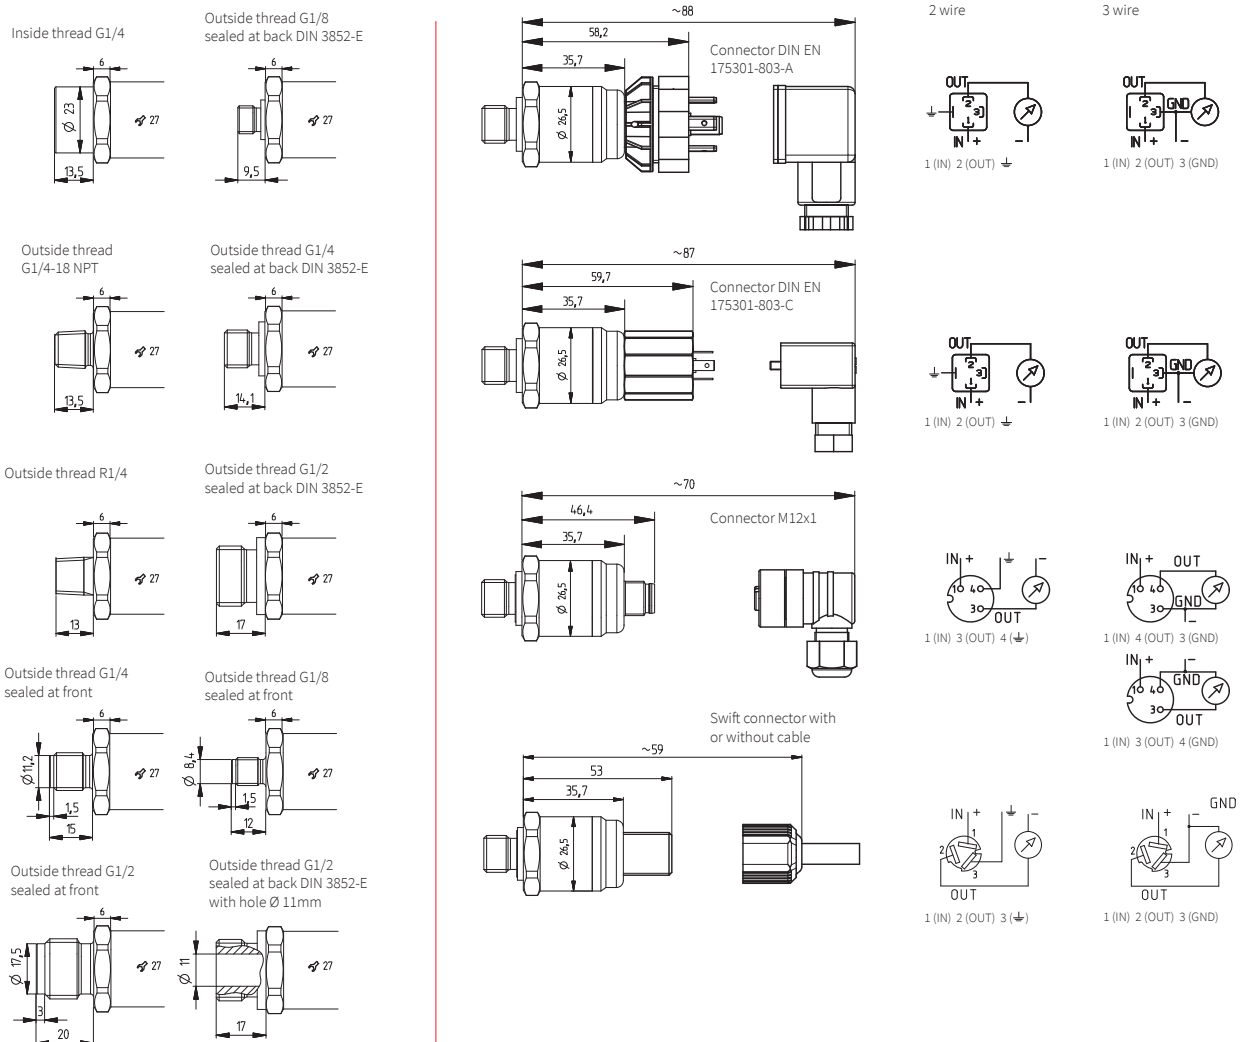

¹⁾ Other pressure ranges on request

²⁾ Delivery without female connector

Huba Control AG

Headquarters Schweiz
Industriestrasse 17
CH-5436 Würenlos
Telefon +41 56 436 82 00
Fax +41 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG

Niederlassung Deutschland
Schlattgrabenstrasse 24
D-72141 Walddorfhäslach
Telefon +49 7127 2393 00
Fax +49 7127 2393 20
info.de@hubacontrol.com

Huba Control AG

Vestiging Nederland
Hamseweg 20A
NL-3828 AD-Hoogland
Telefoon +31 33 433 03 66
Telefax +31 33 433 03 77
info.nl@hubacontrol.com

Huba Control SA

Succursale France
Rue Lavoisier
Technopôle Forbach-Sud
F-57602 Forbach Cedex
Téléphone +33 3 87 84 73 00
Télécopieur +33 3 87 84 73 01
info.fr@hubacontrol.com

Huba Control AG

Branch Office United Kingdom
Unit 13 Berkshire House, County Park
Business Centre, Shivenham Road
Swindon - Wiltshire SN1 2NR
Phone +44 1993 77 66 67
Fax +44 1993 77 66 71
info.uk@hubacontrol.com

www.hubacontrol.com

