



Pressure transmitter

Huba Control

Relative pressure transmitter for mobile hydraulic Type 550



The pressure transmitter type 550 meets the highest requirements for mobile hydraulic applications. This sensor is available with protection standard IP 67 or IP 69K. The standard pressure orifice prevents damage due to pressure peaks.

The compact and rugged design meets the requirement of shock- and vibration stability according road vehicle standards ISO 16750. The pressure transmitter type 550 guarantees highest EMC stability according to various road vehicle regulations with test level up to 100V.

The measuring cell is based upon the Huba Control developed thick film technology on stainless steel and is fully hermetically welded.

Pressure range 0 ... 40 – 600 bar

- + Compact and rugged construction for high operating reliability
- + Welded construction – no elastomer seals
- + Excellent EMC capacity
- + Negligible temperature influence on accuracy

Technical Overview

Pressure range

Relative	0 ... 40 – 600 bar
----------	--------------------

Operating conditions

Medium		Liquids and gases
	Medium	-40 ... +125 °C
Temperature	Ambient	-40 ... +100 °C
	Storage	-50 ... +100 °C
Tolerable overload	≤ 400 bar	3 x fs
	600 bar	2.5 x fs (max. 1500 bar)
Rupture pressure	≤ 400 bar	6 x fs
	600 bar	4 x fs (max. 2500 bar)

Materials

Case		Stainless steel 1.4404 / AISI 316 L
Plug accommodation		Polyarylamide 50% GF UL 94 V-0
Materials in contact with the medium	Pressure connection	Stainless steel 1.4404 / AISI 316 L
	Sensor	Stainless steel

Electrical overview

	Output	Power supply	Load	Current consumption
2 wire	4 ... 20 mA	7.5 ... 33 VDC	$< \frac{\text{supply voltage} - 7.5 \text{ V}}{0.02 \text{ A}}$ [Ohm]	< 23 mA
	0 ... 5 V	7 ... 33 VDC	>10 kOhm / < 100 nF	< 7 mA
3 wire	0 ... 10 V	12 ... 33 VDC	>10 kOhm / < 100 nF	< 7 mA
	ratiom. 10 ... 90%	5 VDC ± 10%	>10 kOhm / < 100 nF	< 7 mA
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.			
Insulation voltage	500 VDC			

Dynamic response

Response time	< 2 ms (10 ... 90%, typ. 1 ms)
Load cycle	< 100 Hz

Elektrical connection

	Protection standard	Protection class
Kostal SLK 2.8 coding A	IP 69K	III
AMP-JPT	IP 67	III
AMP Superseal 1.5	IP 67	III
Deutsch DT04-3P	IP 69K	III
Deutsch DT04-4P	IP 69K	III
Metri Pack 150 P2S Series	IP 67	III
M12x1	IP 69K	III

Pressure connection

	$\frac{1}{16}$ " - 20 UNF	sealing cone 45°
	$\frac{7}{16}$ " - 20 UNF	sealed at back, SAE-4 ORB with O-ring FPM (-20 ... +135 °C)
	$\frac{9}{16}$ " - 18 UNF	sealed at back, SAE-6 ORB with O-ring FPM (-20 ... +135 °C)
Outside thread	$\frac{1}{4}$ " - 18 NPT	
	G $\frac{1}{4}$	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	G $\frac{3}{8}$	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	M14x1.5	sealed at back DIN EN ISO 1179-2 with profile seal FPM (-30 ... +135 °C)
	R $\frac{1}{4}$	acc. EN 10226

Installation arrangement

Unrestricted

Tests / Admissions

	Noise immunity / Noise emission	Noise immunity automotive guideline
	ISO 13766 - earth-moving equipment	ISO 11452-2, HF (Field), 100 V/m (200 ... 2000 MHz)
	DIN EN 13309 - construction equipment	ISO 11452-4, HF (BCI), 100 mA (20 ... 400 MHz)
Electromagnetic compatibility	DIN ISO 14982 - agriculture and forestry	ISO 10605, ESD, ±15 kV contact, ±15 kV air
	Automotive guideline ECE R10 ²⁾	ISO 7637-2 ³⁾ , puls 1, 2a, 2b, 3a, 3b (test level 4)
	Automotive guideline 2004/104/EG ²⁾	ISO 16750-2, Load Dump, 155 V (1 Ω , 300 ms)
	EN 61326-2-3 - pressure transducer ⁴⁾	
	EN 12895:2015 - industrial trucks	
	CISPR11	
Shock acc. ISO 16750-3	50 g, 11 ms, half sine wave, 1000x / axis	
Vibration acc. ISO 16750-3	Test VI (12 g, sinusoidal 18 g random vibration)	
UL	ANSI/UL 61010-1 acc. E325110	
EAC		

Weight

~ 90 g

Packaging (Please state on order)

Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

Accuracy

Parameter		Unit	
Characteristic line acc. IEC 61298-2 ^{5),6)}		% fs	± 0.5
Resolution		% fs	0.1
Thermal characteristic ⁷⁾	max.	% fs/10K	± 0.2
Long term stability acc. IEC 61298-2	max.	% fs	± 0.3

Test conditions: 25 °C, 45% rF

¹⁾ Warranty of IP protection only with suitable classified plug (consider manufacturers' instructions)

³⁾ Pressure sensor for 12 V and 24 V power system (0 ... 5 V, 0 ... 10 V and 4 ... 20 mA)

⁵⁾ incl. zero point, full scale, linearity, hysteresis and repeatability

²⁾ E1 approval for customer specific type on request

⁴⁾ types M12x1 only

⁶⁾ Considering EMC interference < ±1.5% fs

⁷⁾ -40 ... +100 °C

			1	2	3	4	5	6	7	8	9	10	11
Order code selection table in bar			550.	X	X	X	X	X	X	X	X	X	X
Pressure range ¹⁾	0 ... 40 bar		9	3	3	S	0						
	0 ... 60 bar		9	4	0	S	0						
	0 ... 100 bar		9	4	1	S	0						
	0 ... 160 bar		9	4	2	S	0						
	0 ... 250 bar		9	4	3	S	0						
	0 ... 400 bar		9	5	4	S	0						
	0 ... 600 bar		9	5	5	S	0						
▲ Full scale signal at these pressure													
Output / power supply	0 ... 5 V	7 ... 33 VDC						1					
	0 ... 10 V	12 ... 33 VDC						2					
	4 ... 20 mA	7.5 ... 33 VDC						3					
	ratiom. 10 ... 90%	5 VDC ±10%						7					
Electrical connection ²⁾	Kostal SLK 2.8 coding A							7	1				
	AMP-JPT								2				
	AMP Superseal 1.5								3				
	Deutsch DT04-3P	2w: IN=1 / OUT=3							4				
	Deutsch DT04-3P								G				
	Deutsch DT04-4P	3w: IN=2 / OUT=1 / Case 3							Y				
	Metri Pack 150 P2S	2w: IN=B / OUT=A							5				
	Metri Pack 150 P2S							1,2	J				
									S				
	M12x1	2w: IN=1 / OUT=3							M				
Pressure connection ¹⁾		2w: IN=1 / OUT=4											
		2w: IN=1 / OUT=2						3	P				
		7/16"-20 UNF								2	2	1	
		7/16"-20 UNF sealed at back, SAE-4 ORB with O-ring FPM								G	2	1	
		9/16"-18 UNF sealed at back, SAE-6 ORB with O-ring FPM								V	2	1	
		1/4"-18 NPT								3	2	1	
		G 1/4 sealed at back DIN EN ISO 1179-2 with profile seal FPM								4	2	1	
Pressure range variation (optional)		G 1/4 sealed at back DIN EN ISO 1179-2 with profile seal FPM ³⁾								H	2	1	
		M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM								6	2	1	
		R 1/4 acc. EN 10226								7	2	1	
	Indicate W and state range on order (e.g.: W0... + 50bar/Out1...8V)												W



			1	2	3	4	5	6	7	8	9	10	11
Order code selection table in psi			550.	X	X	X	X	X	X	X	X	X	X
Pressure range ¹⁾	0 ... 750 psi		9	D	0	S	0						
	0 ... 1000 psi		9	D	1	S	0						
	0 ... 2000 psi		9	D	2	S	0						
	0 ... 3000 psi		9	D	3	S	0						
	0 ... 5000 psi		9	E	4	S	0						
	0 ... 7500 psi		9	E	5	S	0						
▲ Full scale signal at these pressure													
Output / power supply	0 ... 5 V	7 ... 33 VDC						1					
	0 ... 10 V	12 ... 33 VDC						2					
	4 ... 20 mA	7.5 ... 33 VDC						3					
	ratiom. 10 ... 90%	5 VDC ±10%						7					
Electrical connection ²⁾	Kostal SLK 2.8 coding A							7	1				
	AMP-JPT								2				
	AMP Superseal 1.5								3				
	Deutsch DT04-3P	2w: IN=A / OUT=B							4				
	Deutsch DT04-3P								G				
	Deutsch DT04-4P	3w: IN=2 / OUT=1 / Case=3							Y				
	Metri Pack 150 P2S	2w: IN=B / OUT=A							5				
	Metri Pack 150 P2S							1,2	J				
									S				
	M12x1	2w: IN=1 / OUT=3							M				
Pressure connection ¹⁾		2w: IN=1 / OUT=4											
		2w: IN=1 / OUT=2						3	P				
		7/16"-20 UNF								2	2	1	
		7/16"-20 UNF sealed at back, SAE-4 ORB with O-ring FPM								G	2	1	
		9/16"-18 UNF sealed at back, SAE-6 ORB with O-ring FPM								V	2	1	
		1/4"-18 NPT								3	2	1	
		G 1/4 sealed at back DIN EN ISO 1179-2 with profile seal FPM								4	2	1	
Pressure range variation (optional)		G 1/4 sealed at back DIN EN ISO 1179-2 with profile seal FPM ³⁾								H	2	1	
		M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM								6	2	1	
		R 1/4 acc. EN 10226								7	2	1	
	Indicate W and state range on order (e.g.: W0... + 650psi/Out1...8V)												W

¹⁾ Other pressure ranges and pressure connections on request




²⁾ Delivery without female connector

³⁾ Pressure range ≤ 250 bar, 3000 psi (max. rupture pressure 1000 bar, 14500 psi)





											1	2	3	4	5	6	7	8	9	10	11											
Order code selection table in MPa											550.											X	X	X	X	X	X	X	X	X	X	X
Pressure range ¹⁾	0 ... 4 MPa										9	H	3	S	0																	
	0 ... 6 MPa										9	K	0	S	0																	
	0 ... 10 MPa										9	K	1	S	0																	
	0 ... 16 MPa										9	K	2	S	0																	
	0 ... 25 MPa										9	K	3	S	0																	
	0 ... 40 MPa										9	L	4	S	0																	
	0 ... 60 MPa										9	L	5	S	0																	
▲ Full scale signal at these pressure																																
Output / power supply	0 ... 5 V 7 ... 33 VDC																1															
	0 ... 10 V 12 ... 33 VDC																2															
	4 ... 20 mA 7.5 ... 33 VDC																3															
	ratiom. 10 ... 90% 5 VDC ±10%																7															
Electrical connection ²⁾	Kostal SLK 2.8 coding A																7	1														
	AMP-JPT																	2														
	AMP Superseal 1.5																	3														
	Deutsch DT04-3P 2w: IN=A / OUT=B 3w: IN=A / OUT=C / GND=B																	4														
	Deutsch DT04-3P 3w: IN=A / OUT=B / GND=C																	G														
	Deutsch DT04-4P 3w: IN=2 / OUT=1 / Case=3 4w: IN=2 / OUT=4 / GND=1 / Case 3																	Y														
	Metri Pack 150 P2S 2w: IN=B / OUT=A 3w: IN=B / OUT=C / GND=A																	5														
	Metri Pack 150 P2S 3w: IN=C / OUT=A / GND=B																1,2	J														
	M12x1 2w: IN=1 / OUT=3 3w: IN=1 / OUT=4 / GND=3																	S														
Pressure connection ¹⁾	2w: IN=1 / OUT=4 3w: IN=1 / OUT=3 / GND=4																	M														
	2w: IN=1 / OUT=2 3w: IN=1 / OUT=3 / GND=4																3	P														
	Outside thread	7/16-20 UNF																	2	2	1											
		7/16-20 UNF sealed at back, SAE-4 ORB with O-ring FPM																	G	2	1											
		9/16-18 UNF sealed at back, SAE-6 ORB with O-ring FPM																	V	2	1											
		1/4-18 NPT																	3	2	1											
		G 3/4 sealed at back DIN EN ISO 1179-2 with profile seal FPM																	4	2	1											
		G 1/2 sealed at back DIN EN ISO 1179-2 with profile seal FPM ³⁾																	H	2	1											
		M14x1.5 sealed at back DIN EN ISO 1179-2 with profile seal FPM																	6	2	1											
R 1/4 acc. EN 10226																	7	2	1													
Pressure range variation (optional)	Indicate W and state range on order (e.g.: W0... + 5MPa/Out1...8V)																						W									
Accessories (supplied loose)											Order Number																					
Set - Female connector Kostal SLK 2.8 coding A										2 wire (3 wire with 1 blanking plug)										120369												
Set - Female connector Kostal SLK 2.8 coding A										3 wire										120368												
Set - Female connector AMP JPT										2 wire (3 wire with 1 blanking plug)										110442												
Set - Female connector AMP JPT										3 wire										108767												
Set - Female connector AMP Superseal 1.5 (0.5 - 1.0 mm ²⁾										3 wire (Blanking Plug to enable 2 wire)										120254												
Set - Female connector AMP Superseal 1.5 (1.0 - 1.5 mm ²⁾										3 wire (Blanking Plug to enable 2 wire)										120255												
Set - Female connector Metri Pack 150 P2S Series										3 wire										120345												
Calibration certificate																				104551												







Kostal SLK 2.8








AMP JPT








AMP Superseal 1.5

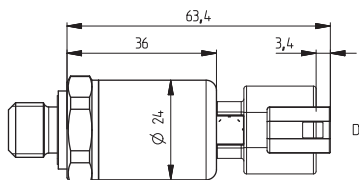






Deutsch DT04-3P







Metri Pack Series 150 P2S



M12x1



Deutsch DT04-4P



Huba Control AG

Headquarters Schweiz
Industriestrasse 17
CH-5436 Würenlos
Telefon +41 56 436 82 00
Fax +41 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG

Niederlassung Deutschland
Schlattgrabenstrasse 24
D-72141 Walddorfhäslach
Telefon +49 7127 2393 00
Fax +49 7127 2393 20
info.de@hubacontrol.com

Huba Control AG

Vestiging Nederland
Hamseweg 20A
NL-3828 AD-Hoogland
Telefoon +31 33 433 03 66
Telefax +31 33 433 03 77
info.nl@hubacontrol.com

Huba Control SA

Succursale France
Rue Lavoisier
Technopôle Forbach-Sud
F-57602 Forbach Cedex
Téléphone +33 3 87 84 73 00
Télécopieur +33 3 87 84 73 01
info.fr@hubacontrol.com

Huba Control AG

Branch Office United Kingdom
Unit 13 Berkshire House, County Park
Business Centre, Shivenham Road
Swindon - Wiltshire SN1 2NR
Phone +44 1993 77 66 67
Fax +44 1993 77 66 71
info.uk@hubacontrol.com

www.hubacontrol.com

